FR1500-ID

Slave Fingerprint reader

FR1500-ID is a stylish single-gang flush-mounted slave fingerprint reader for inBio and inBio Pro panels, only.

FR1500-ID features

Sleek Stylish Form Factor:
Flush-mounted stainless steel enclosure with slim and attractive design is ideal for both indoor & outdoor installations where aesthetics are very important.
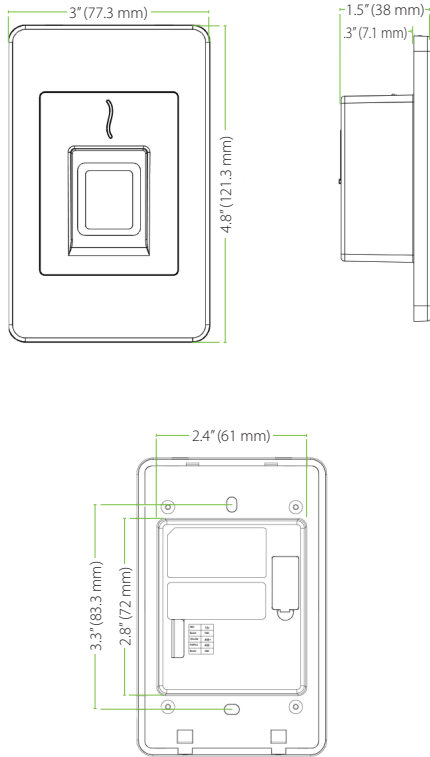
Easy Operation:
Once a user places their finger on the FR1500-ID their fingerprint is subsequently matched by the InBio (or InBioPro) panel. FR1500-ID also provides Visual indication for acceptance/rejection of the fingeprint (and/or prox card) of the users.
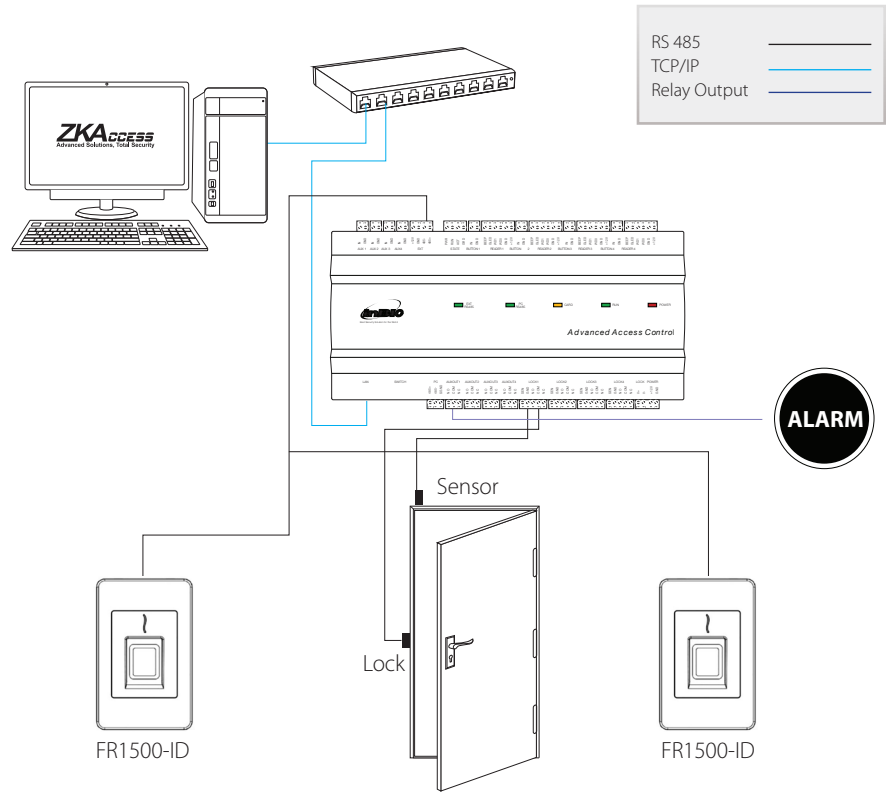
Communication:
FR1500-ID connects only via RS485 to InBio & InBioPro panels. FR1500-ID does not support Wiegand.

Standard Reader:
- SilkID fingerprint sensor
- Built-in ZKAccess prox card reader
- Options for HID and Mifare card readers

Dimensions

3" (77.3 mm)

4.8" (121.3 mm)

1.5" (38 mm)
.3" (7.1 mm)

2.4" (61 mm)

3.3" (83.3 mm)

2.8" (72 mm)

Installation with InBio (or InBioPro) panel

RS 485	————
TCP/IP	————
Relay Output	————

ALARM

Sensor

Lock

FR1500-ID

FR1500-ID

Specificaton

Communication
RS485 only to InBio & InBioPro panels

Power:
12V DC, 1A

Environment:
Operating Temp: 14° to 113° F (-10° to 45° C)
Operating Humidity: 20% to 80%

Optional Card Reader:
Mifare Card, HID 125 kHz card, HID iClass card

Dimensions
Length: 4.8 inches (121.3 mm)
Width: 3 inches (77.3 mm)
Depth: .3 inches (7.1 mm) exposed
        1.5 inches (38 mm) behind wall

Part Numbers

FR1500-ID: with ZKAccess ID card reader
FR1500-Mifare: with Mifare card reader
FR1500-HID: with HID 125 kHz card reader
FR1500-iClass: with HID iClass card reader

**For single-gang installations be sure to additionally order a ZKAccess single-gang adapter

---

ZKAccess

6 Kingsbridge Road, Unit 8, Fairfield, NJ 07004
Phone: (862) 505-2101 • Fax: (862) 204-5906 • sales@zkaccess.com • www.zkaccess.com

CE FC RoHS