

CHANNEL VISION *Central*

C-0232, C-0234, & C-0238 2GHz RF Splitters


Power Passing All Ports

Channel Vision's C-0232, C-0234, and C-0238 are 2-way, 4-way, and 8-way splitters that are capable of passing signals as high as 2GHz. Power Passing All Ports


Features:

- 2GHz rated for high bandwidth pass through
- Vertical F-connectors for easy connection
- Compatible with Channel Vision enclosures


Parameter	Frequency Range (MHz)	2/4/8-way splitters (5-2000MHz)		
		C-0232	C-0234	C-0238
Insertion Loss (dB Typical)	5-1000	3.5	7.5	11.5
	1000-2000	6	10	14
Return Loss (dB Min)	5-1000	15	13	13
	1000-2000	13	13	14
Isolation (dB Min)	40-1000	22	25	23
	1000-2000	22	23	24
Impedance	5-2300	75 ohms		
Passes	DC on all ports (does NOT pass IR)			

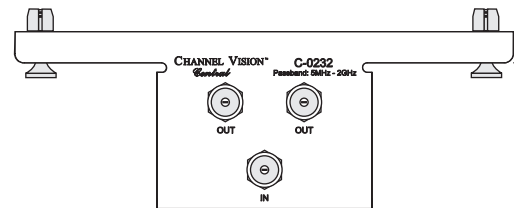

C-0232

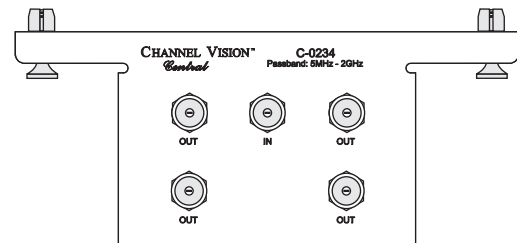

C-0234

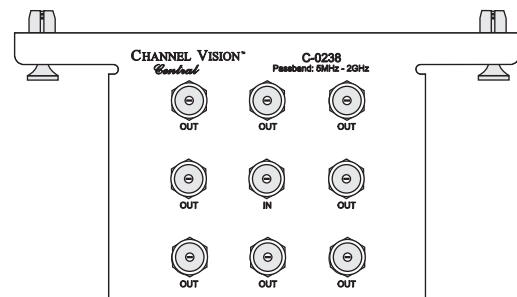

C-0238



CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626
 (714) 424-6500 □ (800) 840-0288 □ (714) 424-6510 fax
 www.channelvision.com □ email: sales@channelvision.com