



Wireless  
Security  
Solutions



## RE201 Honeywell-Compatible Standard Door / Window

### Features

- For sensing things that open or separate.
- Magnet and Internal reed switch.
- 2 supplemental hardwire zones.
  - Outer terminal.
  - Inner terminal.
- Cover tamper.
- Strong, reliable RF signal.
- 10-15 year battery life on CR123A battery.
- Low Battery indication.

### Key Instructions

- Battery “+” faces towards spring.
- Panels assume hardwire zone alarm is state in which contact was enrolled.
- Loops:
  - Reed switch = Loop 2.
  - External Contact Terminals:
    - Outer terminal = Loop 1.
    - Inner terminal = Loop 3.
    - Center hardwire terminal is common.
    - No end-of-line resistors on hardwire zones.
    - Ext Loops are: normally closed - alarm on open
  - Tamper = Loop 4
- Enrolling:
  - Place Panel in RF Learning mode.
  - Input Type = RF
  - Lynx \*56 “E I” mode:  
To enroll any particular loop: cause the loop to fault... restore... (panel should beep to indicate ID capture)... fault... restore... [panel will confirm enrollment].
  - Vista \*56 “10 INPUT S/N: L” mode:  
Transmit two open/close sequences.  
Press \* (to check for duplicate serial/loop number).  
Press \* (to continue to confirmation screen).  
Press \* if you wish to skip confirmation; or “Yes” and activate the loop to confirm.

### Operation


- Magnetic reed switch (Loop 2):  
Alarm, when magnet is pulled away from reed switch.
- Hardwire zones (Outer=Loop 1, Inner=Loop 3)  
Alarm: when contact changes to alarm condition.  
Tamper: none.
- Tamper (Loop 4), when cover is opened.
- Supervisories, every hour.

### Specifications

Magnet trip distance:	1 inch nominal
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	CR123A 1550mAH
Temperature Range:	0F to 120F
Housing dimensions:	3.3x1.4x1.1 inches

Specifications subject to change without notice.

### Internal Picture

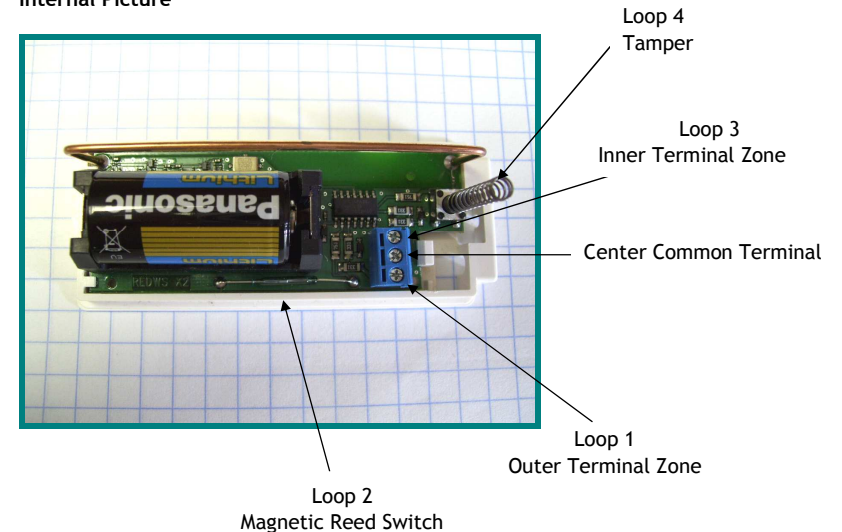

## Notices

“GE”, “Honeywell”, and “DSC” are trademarks owned by General Electric Company, Honeywell International Inc., and Tyco Safety Products Canada LTD, respectively.

Resolution Products, Inc. products will function with one of either GE, DSC or Honeywell systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell or DSC. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

### Warranty

Resolution Products, Inc. will replace products that are defective in their first year.

### FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE201X

### IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec d'Industrie Canada RSS standard exempts de licence. Son fonctionnement est soumis aux deux conditions suivantes:

1. Ce dispositif ne peut causer des interférences, et
2. Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

IC: 8310A-RE201