

LOOKING FOR A RELIABLE & SECURE WIRELESS SOLUTION?

The Old Way

Traditional One-Way Wireless




When activated, the sensor must "shout" repeatedly



The receiver can only "listen"

The ELK Way

Two-Way Wireless

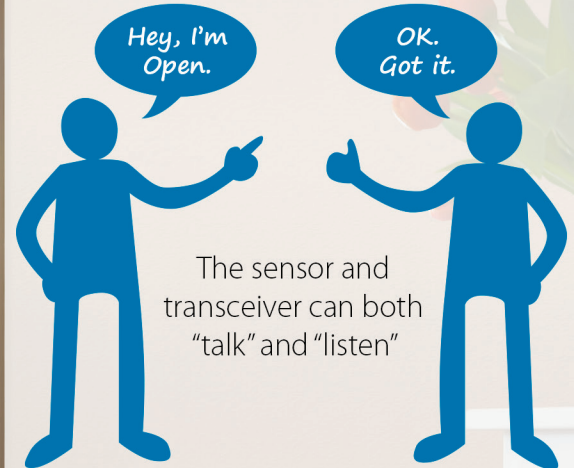

The sensor and transceiver can both "talk" and "listen"

Experience ELK's Two-Way Wireless Technology for M1 Controls



Advanced features ensure reliability, simplify installation and provide innovative security enhancements.

- True two-way signal acknowledgement
- Utilizes cutting-edge technology to defend against interference, hacking, and jamming
- Assures installation confidence through signal quality and status LED indicators
- 902-928 MHz frequency-hopping spread spectrum to ensure signal gets through

NEW DESIGN!

4-Button Keyfob



ELK-6010

NOW WITH REPLACEABLE BATTERY!

Features a LED feedback indicator and allows users to arm, disarm, check status, and trigger a panic alarm.

- Status inquiry button & LED indicator provides arm, disarm, and alarm memory status
- 3V CR2032 lithium battery
- Size: 1.37"W x 2.44"L x .52"D

Recessed Door Contact



ELK-6023 (White)
ELK-6023BR (Brown)

Designed for wood or vinyl doors, becomes nearly invisible once the door is closed.

- Tamper: Microswitch detects removal of cover
- Maximum Operating Gap of Reed: 3/4"
- 3.6V 1/2 AA size lithium battery
- Size: 0.75"D x 2.5"L Mag: 0.75"D x .625"L
- Extra magnets (10 pk): ELK-SM23 (White), ELK-SM23BR (Brown)

Sound All™ Smoke Detector



ELK-6050

In the event of a fire alarm, the built-in sounders of all enrolled smoke detectors are activated, providing a wirelessly interconnected solution for residential installations.

- Photoelectric Smoke Detection
- Rapid "rate-of-rise" temperature detection
- Fixed temperature(135° F) heat detection
- 3V CR123A lithium batteries (2)
- Size: 5.6"W x 2.4"H



Securing & Simplifying Life

(800)797-9355
www.elkproducts.com

Panic Button



ELK-6011

Ideal for activating a panic/emergency alarm. Features a single press and hold button plus a red LED feedback indicator.

- Water resistant lanyard included
- Welded case for enhanced water resistance, non-replaceable battery
- Size: 1.43"W x 1.9"L x .53"D

PIR Motion Sensor



ELK-6030

ELK-6030P (Pet Immunity)

Features a bright white LED that activates during alarm and is also programmable through rules.

- Ease of installation with keypad initiated walk test
- Industry First Security/Convenience Light
- Adjustable sleep mode durations and pulse count
- 3V CR123A lithium batteries (2)
- Size: 2.8"W x 4.4"H x 1.9"D

Glass Break Sensor



ELK-6040

Listens for actual patterns of breaking glass across the full audio band using Pattern Recognition Technology™.

- Omni-directional microphone, 360° detection
- Detection range: 20 ft. (6m) x 360°
- Min. distance from glass: 4 ft. (1.2m)
- 3V CR123A lithium battery
- Size: 4.25"W x 3.13"H x 1.70"D

Slim Line Door/Window Sensor



ELK-6020 (White)

ELK-6020BR (Brown)

Ideal for narrow door and window jambs.

- One built-in reed switch
- Front and back tamper option
- Maximum operating gap of reed: 1/2"
- 3.6V ER14250 lithium battery
- Size: .71"W x 3.4"L x .8"D
Magnet: .57"W x 1.5"L x .6"D
- Extra Magnets (10 pk): ELK-SM20 (White), ELK-SM20BR (Brown)

Mini Window Sensor



ELK-6021 (White)

ELK-6021BR (Brown)

Exceptionally thin, perfect for double hung and casement style wood/vinyl windows.

- One built-in reed switch
- Maximum operating gap of reed: 3/8"
- 3V CR2032 lithium battery
- Size: 1.1"W x 2.3"L x .25"D
Magnet: .37"W x 2.3"L x .25"D
- Extra Magnets (10 pk): ELK-SM21 (White), ELK-SM21BR (Brown)

Universal 3-Zone Sensor



ELK-6022

Secure up to 3 doors, windows, etc. with one built-in reed switch plus two external closed circuit inputs

- One built-in reed switch
- Two zone inputs for external wired contacts
- Front and back tamper option
- Maximum operating gap of reed: 1/2"
- 3V CR123A lithium battery
- Size: 1.5"W x 3"L x .9"D Magnet: .6"W x 1.5"L x .6"D
- Extra Magnets (10 pk): ELK-SM20

Two-Way Wireless Transceiver



ELK-M1XRFTW

Allows an M1 Gold or M1EZ8 control to accept Elk's complete line of two-way wireless sensors.

- Allows up to 144 wireless zones (sensors)
- Operates from the 4 wire RS-485 Data Bus
- Multiple receivers may be connected to a single control for greater coverage

Two-Way Wireless Starter Kit



ELK-M1XRFTWKIT

Easily add Two-Way Wireless to any M1 control with this money saving kit. Includes:

- (1) M1 Two-Way Wireless Transceiver
- (2) Slim Line Door & Window Sensors
- (2) Four Button Keyfobs
- (1) Motion Sensor (PIR) with Pet Immunity

M1 Gold Two-Way Wireless Kit



ELK-M1GSYS4STW

Money saving kit includes:

- M1 Gold Control Board
- Two-Way Wireless Transceiver & 4 Button Keyfob
- M1KP2 LCD Keypad
- SWB14 Enclosure
- 1280 8Ah Battery & TRG1640 AC Transformer
- 73 Echo™ Paintable Interior Speaker
- 952 In-line Telephone Surge Protector
- RJSET Telco Jack & Cord

