

5865-3 / 5865-4

LED Annunciators

5865-3 and 5865-4 LED annunciators provide 30 programmable LEDs (15 red, 15 yellow) for maximum flexibility with the Honeywell Silent Knight Series fire alarm control panel. The 5865-3 fits into a standard 3-gang electrical box and the 5865-4 fits into a standard 4-gang electrical box. The annunciators are covered by semi-transparent labels and a cover plate. Up to eight 5865 series annunciators can be used with the FACP. The 5865-3 provides alarm and trouble annunciation for 15 zones while the 5865-4 adds reset and silence input switches for even more versatility.


COMPATIBILITY

The 5865-3 and 5865-4 are compatible with the following Honeywell Silent Knight FACP:

- 6820:** Addressable fire alarm control panel
- 6820EVS:** Addressable fire alarm control panel with an emergency mass notification system.
- 6808:** Addressable fire alarm control panel
- 6700:** Addressable fire alarm control panel
- 5700:** Addressable fire alarm control panel
- 5808:** Addressable fire alarm control panel
- 5820XL:** Addressable fire alarm control panel
- 5820XL-EVS:** Addressable fire alarm control panel with an emergency mass notification system



5865-3

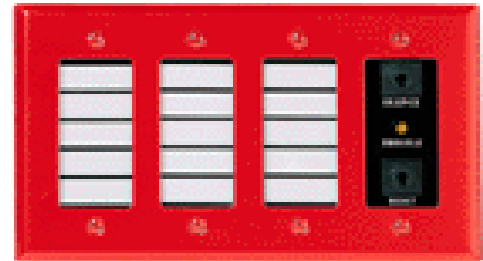

5865-4

FEATURES & BENEFITS

- 30 programmable LED outputs (15 red and 15 yellow)
- Up to 8 5865s can be used on one panel
- Fit into a standard 3- or 4-gang electrical box
- Comes with four semi-transparent labels that can be typed or printed on
- DIP switch addressable
- Connects to FACP SBUS.
- Both modules UL 864 listed; comply with NFPA 72
- 4-wire connection to FACP SBUS
- MEA Approved 429-92-E, Vol 9
- CSFM Approved
- FM Approved

5865-3 and 5865-4 Technical Specifications


For a complete listing of all compliance approvals and certifications, please visit www.silentknight.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

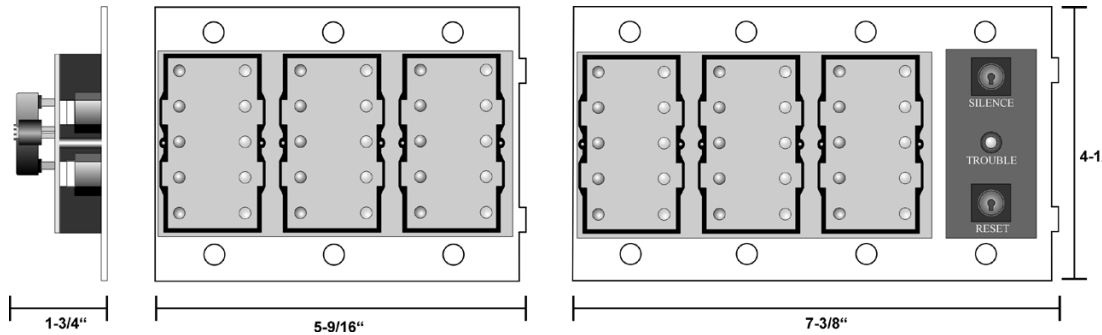

5865-3 and 5865-4 Dimensions

PHYSICAL

5865-3: 5 9/16" L x 4.1" H x 1 3/4" D

5865-4: 7 3/8" L x 4.1" H x 1 3/4" D

ELECTRICAL

Operating Voltage: 24VDC

Standby Current: 35mA

Alarm Current: 145mA

MOUNTING:

5865-3: 3-gang electrical box

5865-4: 4-gang electrical box

ENVIRONMENTAL

Operating Temperature: 32°F to 120°F (0°C to 49°C)

Humidity: 10% to 93% relative humidity (non-condensing)

ORDERING INFORMATION

5865-3: LED Annunciator. Fits 3-gang electrical box. Red.

5865-4: LED Annunciator. Fits 4-gang electrical box. Red.

AGENCY LISTINGS AND APPROVALS

- MEA Approved 429-92-E, Vol 9
- CSFM Approved
- FM Approved
- UL listed

For more information

Learn more about Honeywell Silent Knight and other products by visiting www.silentknight.com

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472
800-328-0103

3500321 F | 11/17
© 2017 Honeywell International Inc.

