

High Performance Siren Driver Module

ELK-100


The ELK-100 Siren Driver is a great choice for residential and commercial security installations. It draws less current than most siren drivers, and offers two volume levels (example: one indoor, the other outdoor) simultaneously. Our exclusive *MilliMiser™* option allows further reduction of current draw for controls that have limited alarm or auxiliary output power. The ELK-100 has two inputs, Yelp & Steady. The Steady sound overrides the Yelp. The Yelp input has our unique *ComboTrigger™* feature, especially designed for controls that have a single alarm output with a pulsing option for fire or burglary. When pulsed, this channel produces a distinctive third sound pattern.

Features

- Two Volume Levels Simultaneously.
- Draws Less Current Than Most Sirens.
- MilliMiser™ Lowers Current Draw.
- Economical - Drives Multiple Speakers.
- ComboTrigger™ For Single Outputs.
- Pre-Wired for easy Installation.
- Lifetime Limited Warranty.

Specifications

- Operating Voltage: 6 to 14 Volts D.C.
- Current Draw: 1.2 Amps, (700mA on *MilliMiser™* setting), with one 8 ohm speaker.
- Sound Level: 120 dB @ 1 meter, 14 Volts D.C., with one 8 ohm speaker.
- Max. Speaker Loading: 4 Ohms.
- Size: 2.75" x 3.6" (70mm x 91mm).

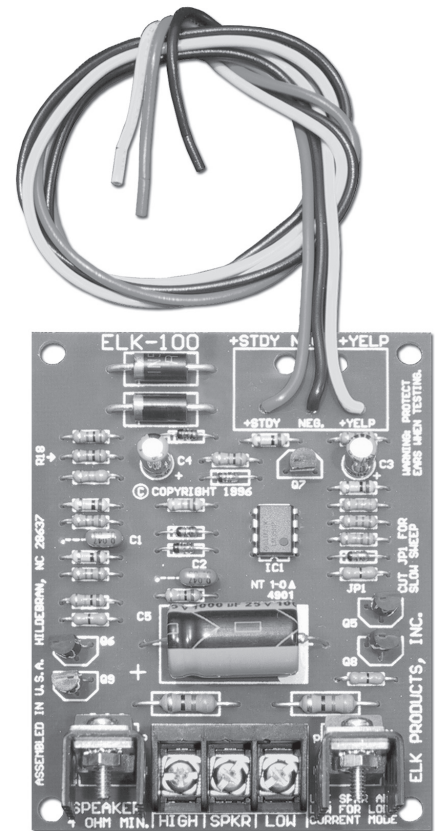

Features and Specifications subject to change without notice.

PO Box 100 • Hildebran, NC 28637 • 800-797-9355 • 828-397-4200
Fax 828-397-4415 • www.elkproducts.com • info@elkproducts.com

05/02

ELK
PRODUCTS