

Sealed Lead Acid Battery

ELK-12260 12 Volt, 26Ah

ELK Sealed Lead Acid Batteries are excellent for the following applications with regard to size, Amp hour rating, and proper terminal connections: battery backup (for Access Control Systems, Fire Alarm Systems, and Security Alarm Systems), emergency lights, lighted exit signs, and uninterruptible power supplies.




Specifications:

- Nominal Voltage: 12 Volts
- Rated Capacity: 26 AH (20 hour rate)
- Length: 6.54" (166mm)
- Width: 6.89" (175mm)
- Height: 4.96" (126mm)
- Weight: 20.06 lbs (9.1kg)
- Terminals: B1-M5 bolt & nut



Electrical Specifications:

Capacity 77°F(25°C)	20 hour rate (1.3A)	26AH
	10 hour rate (2.38A)	23.8AH
	5 hour rate (4.32A)	21.6AH
	1 hour rate (15.6A)	15.6AH
Internal Resistance, Fully Charged Battery (77°F)	10mΩ	
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	32°F (0°C)	65%
Charge Constant Voltage	Cycle: Initial Charging Current less than 7.8A Voltage 14.4V - 15.0V at 77°F(25°C)	
	Standby: Voltage 13.5V - 13.8V at 77°F(25°C)	

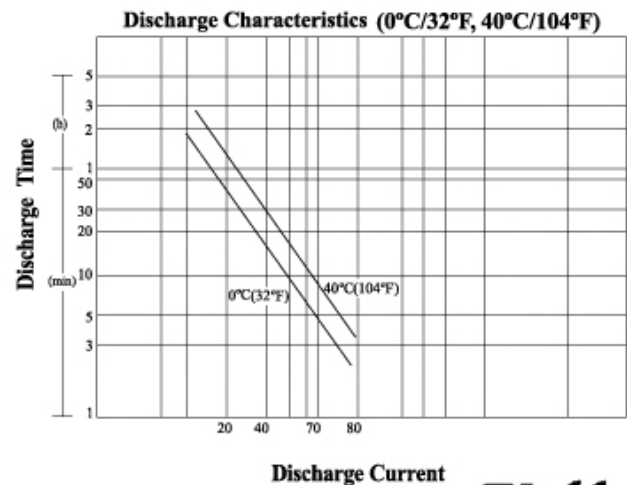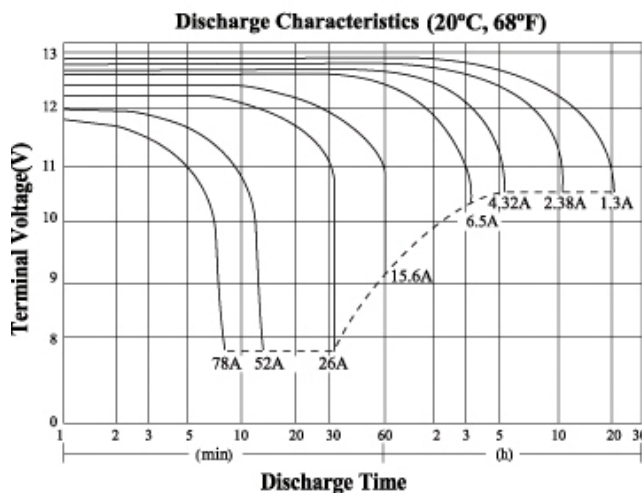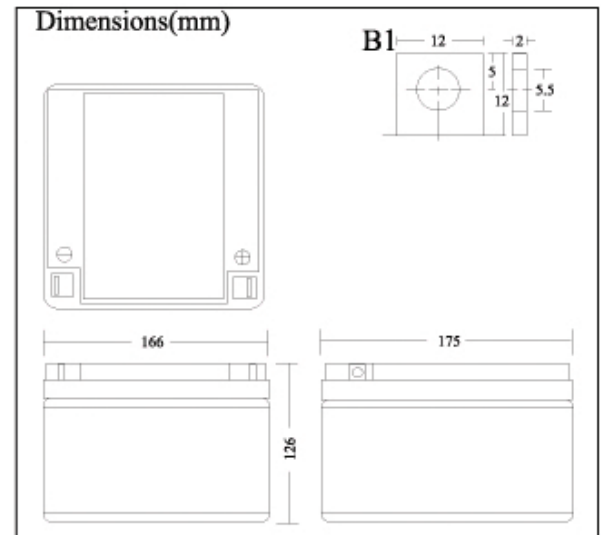

ELK
PRODUCTS



800-797-9355
www.elkproducts.com