

DTK-3VWMUSB

3 Outlet Charging Station with Load Sensing Technology




Product Features

- 120VAC – 15A
- Illuminated load-status indicator – different colors for each level of load status
- 2 port USB charger (Total 5V/2.4A)

Applications

- Cell phones, tablets, other USB devices
- Counter appliances, home office, bedroom

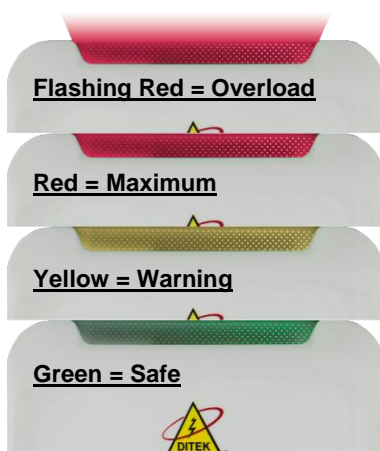

LED Colors for Different Levels of Load Status

Every precaution has been taken to ensure that this literature is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.

DITEK's 3VWMUSB 3 Outlet Charging Stations are the next wave in power distribution devices that combine DITEK's trusted surge protection with a modern look and feel. Your sensitive electronics are safe with features like an illuminated load-status indicator, 3 AC Outlets and 2 USB charging ports.

Is your circuit overloaded? Now you know the answer. Green = Safe; Orange = Warning; Red = Maximum, Flashing Red = Overload.

Technical Specifications

Service Voltage:	120VAC
MCOV:	127VAC
Protection Modes:	L – N, L – G, N – G
Voltage Protection Rating:	500V All Modes
Surge Current Rating:	36,000 Amps
Max. Continuous Current:	15 Amps
Nominal Discharge Current Rating (I _n):	3kA
Operation Frequency:	60Hz

Mechanical Characteristics

Connection Method:	Direct Plug-In
Housing:	ABS
Dimensions:	5.25"L x 3.75"W x 1.13"H (133.35mm x 95.25mm x 28.58mm)

Quality, Standards & Approval

Agency Approvals:	UL1449, cUL
APD Type:	Type 3 SPD
Warranty:	10 Year Limited