


PRODUCT LINEUP



Perimeter Protection (outdoor)

"First Line of Defense" protects the extreme perimeter of a property.

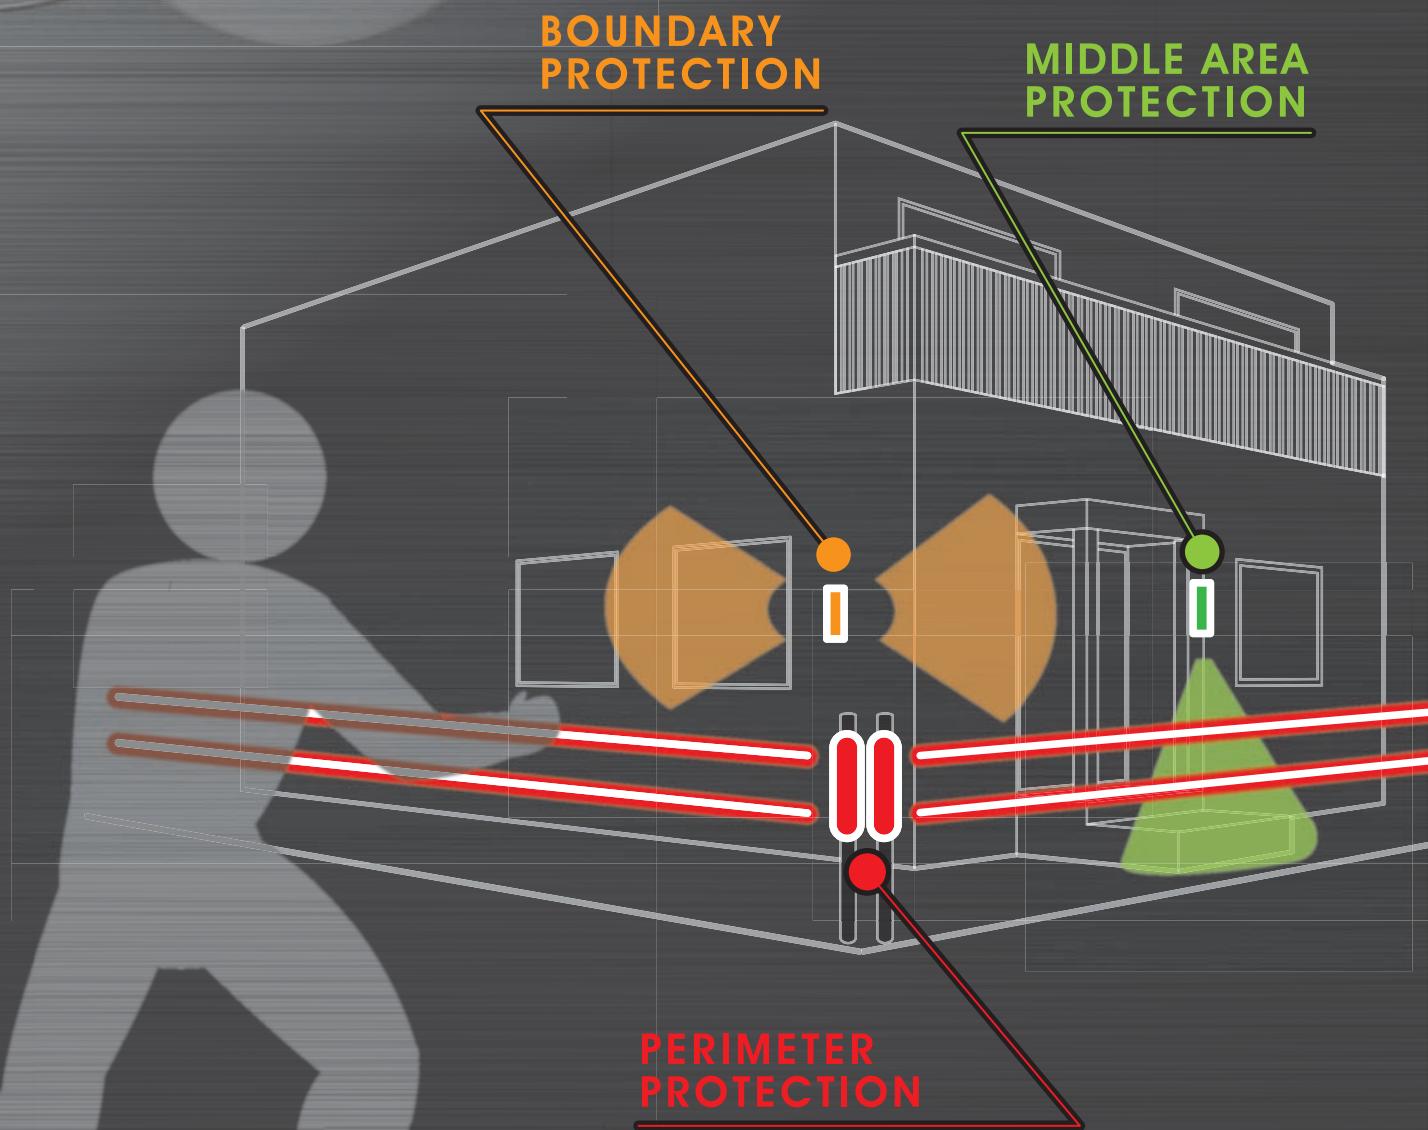

ZI-AO20 / AO40 / AO60

Short range photoelectric detector

ZI-AO20 : detection range 70' (20m)
ZI-AO40 : detection range 130' (40m)
ZI-AO60 : detection range 200' (60m)

FEATURES:

- IP65 rated (rain, dust and insect protection)
- Lightning and surge protection
- 99% beam blocking stability
- A.G.C. (Automatic Gain Control) Circuit



ZI-AO100 / AO200

Selectable beam frequency
Long range photoelectric detector

ZI-AO100 : detection range 350' (100m)
ZI-AO200 : detection range 650' (200m)

FEATURES:

- Selectable 4 channel beam frequencies
- Environmental disqualification circuit
- Lightning and surge protection
- 99% beam blocking stability
- A.G.C. circuit

Middle Area Protection (outdoor)


"Second Line of Defense" protects the middle area between perimeter and boundary of the building.

ZI-PO12

Wide angle weatherized outdoor PIR detector
40' x 50' (12 x 15m) 120° wide

FEATURES:

- Patented double conductive shielding
- Selectable detection patterns (pet alley or multi-level)
- Area-masking stips
- Sensitivity selection switch (high, mid and low)
- Selectable pulse count (test or 2)
- Day and night modes




ZI-PO24

Long range weatherized outdoor PIR detector
80' x 6.6' (24 x 2m) long range

FEATURES:

- Patented double conductive shielding
- Selectable detection patterns (pet alley or multi-level)
- Sensitivity selection switch (high, mid and low)
- Selectable pulse count (test or 2)
- Day and night modes




ZI-POV12

Multiple detection pattern outdoor PIR detector
40' (12m) 90° wide

FEATURES:

- Multiple detection pattern technology
- Limited detection range function
- Size judging function
- Patented double conductive shielding
- Advanced temperature compensation
- Voice recording/warning function
- External speaker terminal



Boundary Protection (outdoor)


"Third Line of Defense" protects the immediate perimeter of the building.

ZI-PB24

Outdoor PIR detector with unique detection range
80' (24m) - 40' (12m) each side

FEATURES:

- Multiple detection pattern technology
- Limited detection range function
- Size judging function
- Patented double conductive shielding
- Audible alarm function
- Advanced temperature compensation




Passive Infrared Detectors (indoor)

Ceiling Mount



(276 zones)




ZI-PI360Z

360° PIR detector with adjustable zoom function

Wall Mount



(78 zones)



ZI-PI12SA1

PIR detector with small animal immunity



CBC (AMERICA) Corp.

New York:
55 Mall Drive
Commack, NY 11725
800 422-6707

California:
20521 Earl Street,
Torrance, CA 90503
800 888-0131

www.computarganz.com

GANZ
SENSOR
09/09