

Securitron® EEB Emergency Exit Button

*Redundant backup
ensures safe egress*



Install the EEB Emergency Exit Button next to the door to provide additional safety and redundancy as required by code when using a motion detector for a request-to-exit device.

Note: ASSA ABLOY Electronic Security Hardware's UL294 certification indicates that when the EEB is used with the XMS Motion Sensor, it meets the NFPA Life Safety Code 101 requirements for exit of access-controlled egress doors.

Features

Standard Features

- Backup device in case of exit sensor failure per BOCA, NFPA, IBC, and VBC code
- Momentarily pressing the EEB releases the door for 30-seconds
- Re-triggerable for added 30-second release
- Interchangeable green and red lenses included standard
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

Optional Features

- Single gang
- Narrow stile
- EEB2 includes standard lenses plus blue ADA lens
- Illumination kits


Specifications

Certifications (EEB2, EEB3N only)

- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- CSFM—California State Fire Marshal

Electrical

- 226 mA peak at 12 VDC
- 118 mA peak at 24 VDC
- 3A SPDT N/C Relay

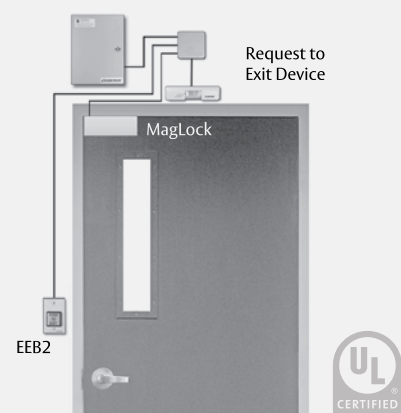

How to Order

Model Series	LED Lens Color	Mounting Method
EEB	3	N
EEB Push Buttons	2 Green/ Red/ Handicap	(blank) Single Gang
	3 Green/Red	N Narrow Gang

Note: Not every combination above is possible. Please contact the factory if you need a combination of features not listed on this page

